


# QUICK START GUIDE

1. Uncrate the console and inspect for any damages.
2. Plug console into electrical outlet that has clean power.

## CAUTION!

- a) A power source with abnormal voltage or excessive noise can result in improper console operation and possible damage not covered under warranty. (ensure electrical outlet is not on an air-conditioning, heater, refrigerator or range circuit).
- b) For maximum battery backup time, allow the UPS to charge for a full eight hours prior to console use.

3. Push the UPS on/off button to power up the system.

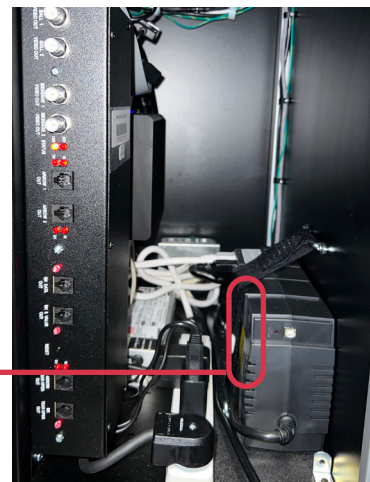


4. On the log in screen, use the touch panel to select the login as Administrator button.
5. Ensure your state logo is on the log in screen.
6. Key in the password 13629, then enter.

7. Touch the PLAY BINGO button and the Schedule screen will appear.



# QUICK START GUIDE

8. On the schedule screen, select **Multi U-Pick Demo** and then press play.

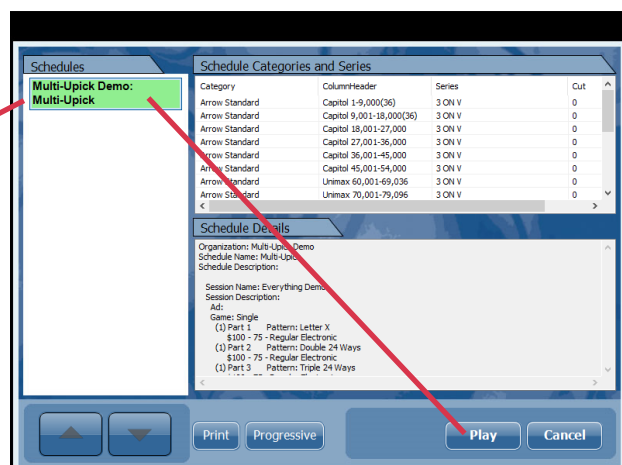

9. Load bingo balls into mixing chamber.
10. Turn on mixer motor and blower motor.

11. Call balls. As balls are called and placed in the ball tray, the called ball will be shown on the flashboard area of the screen. Continue calling balls until a winner has been declared from the floor.
12. Now that the console is working, you may program sessions.



13. Console Hierarchy: (order in which to build a bingo session)


- a) HALL
- b) Organization 1
- c) Schedule 1
- d) Session 1
- e) Game 1
- f) Game Part 1
- g) Category 1 (type/cut)
- h) Series 1 (number)

*For detailed programming help follow the demo session included within the console.*

14. Create a backup USB drive by inserting the drive on the hub on top of the console

- a) Exit Session.
- b) Press Utilities.
- c) Press Backup on the left side menu.
- d) Once the thumb drive is inserted the center Backup button will be highlighted so you can press the middle Backup and it will start.
- e) When finished press the Eject Media and you are done.

**NOTE:** Please back up your console frequently in case you are hit with a power spike you have all your data, games and programs ready to reinstall.

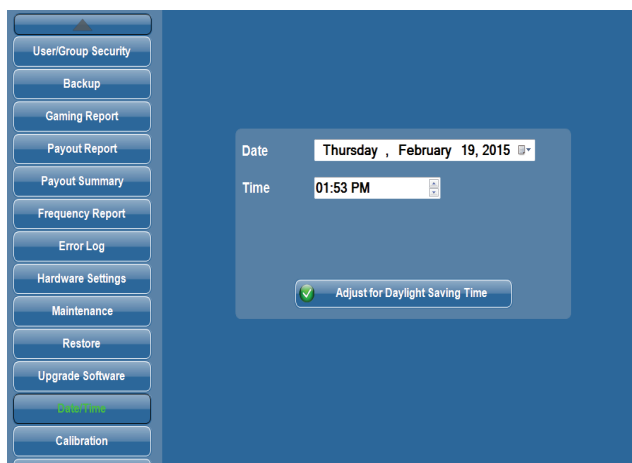

15. From the main menu press Utilities then select the Calibration button to calibrate.

16. From the main menu press Utilities then select the date/time button to set up.

# QUICK START GUIDE



17. Hook up your flashboards into the data router

18. From the main menu press *Utilities* then select the *Lamp Test* to check.

**WARNING: A PROPER SHUTDOWN OF THE GAMING COMPUTER IS REQUIRED.**

- a) Close your Schedule
- b) Log off the console by hitting LOGOUT on the main screen
- c) Now hit the SHUTDOWN button on the main menu
- d) Prompt messages appear reminding you to back up your system and confirm the shutdown

**Product Support Center**  
**1-800-277-6214**

